



GPM-8212




FEATURES

- * Simultaneous Display of W, A, V (PF or Hz)
- * True RMS V, A, W
- * Auto Calibration Via Computer
- * Max. / Min. / Hold Function
- * High Immunity to External Noise
- * CT Ratio (1 ~ 9999)
- * PT Ratio (1 ~ 9999)
- * Option : RS-232C or RS-485 Interface

The GPM-8212 is a bench-top power meter suitable for middle- to high-end application. Performance and functionality are maintained at the highest level as in maximum 9999 CT/PT ratio, high immunity to external noise, and true RMS voltage/current/power. Extra attention is paid to simplify setup and operation. The large 0.56" display shows all three units, Wattage/Voltage/Current, either in Pf or Hz, simultaneously. PC connection through RS-232C or RS-485 interface adds automatic calibration feature providing minimum error factor and data/control interface for automated test systems.

SPECIFICATIONS	
VOLTAGE	
Range	5V, 10V, 20V, 40V, 80V, 160V, 320V, 640V total 8 ranges by auto-range or manual.
Measurement Type	True RMS
Input Resistance	≥1M
Maximum Input Voltage	1000V(peak), 700V(rms)
PT Ratio Setting	1 ~ 9999
Accuracy (at 23°C±5°C) (Sinewave)	±0.1% of reading±0.1% of range
CURRENT	
Range	160mA, 320mA, 640mA, 1.280A, 2.560A, 5.120A, 10.24A, 20.48A total 8 ranges by auto-range or manual
Measurement Type	True RMS
Input Resistance	0.01
Maximum Input Current	30A(peak), 20A(rms)
CT Ratio Setting	1 ~ 9999
Accuracy (at 23°C±5°C) (Sinewave)	±0.1% of reading±0.1% of range
WATT	
Measurement Range	0.32mW ~ 13.10kW
Measurement Type	True rms
Accuracy (at 23°C±5°C) (Sinewave)	±0.2% of reading ±0.2% of range
POWER FACTOR	
Range	0.001 ~ 1.000
Computation	W/(V x A) = Power factor (PF)
FREQUENCY	
Measurement Range	40Hz ~ 400Hz
Accuracy (23°C ±5°C)	±0.2% of reading ±2 digits
GENERAL	
Display	4 digits 0.56" LED and 2 sets of 4 digits 0.4" LED
Minimum Input	2% of range
Response Time	2 cycles/sec
Overload Indicating	" O.L "
INTERFACE	
Optional : RS-232C or RS-485 Interface	
POWER SOURCE	
AC 100 ~ 230V, 50/60Hz	
DIMENSIONS & WEIGHT	
251(W) x 91(H) x 291(D) mm, Approx. 1.6kg	

Rear Panel

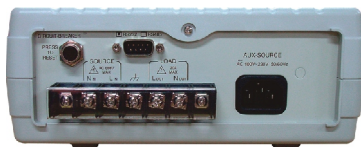

ORDERING INFORMATION
GPM-8212 A.C. Power Meter
ACCESSORIES : User manual x 1 , Power cord x 1
Option
Opt.01 RS-232C Interface (Factory Installed) Opt.02 RS-485 Interface (Factory Installed)
Optional Accessories
GTL-232 RS232C Cable, 9-pin Female to 9-pin, null Modem for Computer